

AZ725

RELAY ORDERING DATA


COIL SPECIFICATIONS — DC Coil				ORDER NUMBER*		
Nominal Coil VDC	Must Operate VDC	Max. Continuous VDC	Nominal mA $\pm 10\%$	Coil Resistance $\pm 10\%$	Form A (SPST)	Form C (SPDT)
5	3.5	11.3	102.0	49	AZ725-1AE-5D	AZ725-1CE-5D
6	4.2	13.3	88.21	68	AZ725-1AE-6D	AZ725-1CE-6D
12	8.4	26.0	46.2	260	AZ725-1AE-12D	AZ725-1CE-12D
24	16.8	53.5	21.8	1,100	AZ725-1AE-24D	AZ725-1CE-24D
48	33.6	107.0	10.9	4,400	AZ725-1AE-48D	AZ725-1CE-48D
60	42.0	135.0	8.6	7,000	AZ725-1AE-60D	AZ725-1CE-60D

* Substitute "1BE" in place of "1AE" for Form B contacts. Add suffix "E" for epoxy sealed version. When suffix "E" is specified for Epoxy Seal, refer to AZ "Relay Technical Notes" on AZ website - Product Resources. Consult factory for other PCB process conditions that may apply.

HARDWARE ORDERING DATA

DESCRIPTION	ORDER NUMBER
Socket	ST484-U1
Retaining Clip	ST482-2

MECHANICAL DATA

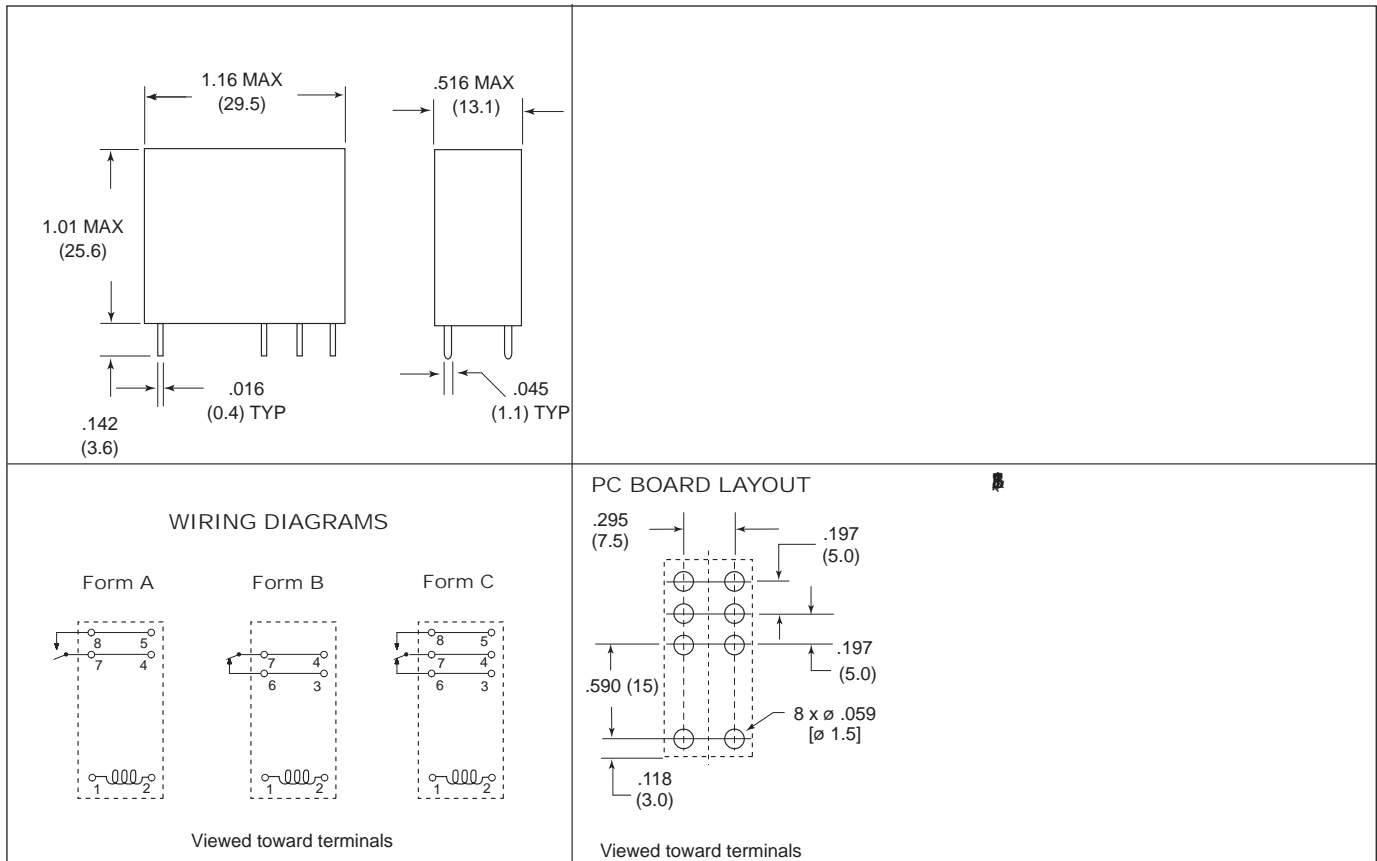

Dimensions in inches with metric equivalents in parentheses. Tolerance: $\pm .010$ "

AMERICAN ZETTLER, INC.

www.azettler.com

75 COLUMBIA • ALISO VIEJO, CA 92656 • PHONE: (949) 831-5000 • FAX: (949) 831-8642 • E-MAIL: SALES@AZETTLER.COM